

REQUEST FOR TRANSIT VEHICLE PRICE QUOTE (RFQ)

This is (check one):

Initial Request for Quote (from Requesting Agency to Vendors)

Due Date: January 12, 2019

Response to RFQ (from Responding Vendor back to Requesting Agency)

VENDOR (Business Name): _____

Vendor Contact Person: _____ Phone: _____

Email Address: _____ Alt Phone: _____

REQUESTING AGENCY INFORMATION

Agency: City of Sandy Date: December 18, 2018

Contact Person: Andi Howell Phone: 503-489-0925

Email Address: ahowell@cityofsandy.com

Agency Address: 16610 Champion Way, Sandy, OR 97055

The above Agency, through its Public Transit program or public transit affiliate, is requesting price quotes from Oregon State Price Agreement Contract Vendors for the purchase of the following vehicle(s):

From (circle): Oregon State Price Agreement / Other No. of Vehicles Required: 2

PTD Vehicle Category (Check): (Please see PTD Vehicle Descriptions and Useful Life Standards)

Cat A Cat B Cat C Cat D Cat E ____ (select from 1 to 3)

Length (can be range): approx 24.5' Regular Seats: 12-15 ADA Stations/Tiedowns: 2

Fuel Type: Gasoline Diesel Bio-fuel Hybrid CNG Propane

High Floor Low Floor Other Comment: _____

The general specification for vehicle is as follows:

| A. VENDOR'S VEHICLE BASE PRICE INFORMATION | | VEHICLE BASE PRICE | |
|--|--|--|---|
| <i>This Section to be completed by Vendor</i> | | <i>Enter base price from State Price Agreement below</i> | |
| Vehicle Make/Model: | | \$ | |
| Length: | | | |
| Fuel Type: | | | |
| Floor: <input type="checkbox"/> High Floor <input type="checkbox"/> Low Floor Other: | | | |
| No. of Regular Passenger Seats: | | | |
| No. of ADA Stations w/Tiedowns Desired: | | | |
| Other Special Note: | | | |
| B. VEHICLE REQUIRED SPECIFICATIONS | | | |
| <i>Requesting Agency completes Option Description column Vendor completes "Vendor Response" columns</i> | | VENDOR RESPONSE | |
| Requesting Agency's Required Specifications Description | | Included in Base Price? YES / NO | \$Additional Cost for Option\$ (or Note Not Available) |
| Gas Chassis GVWR 14,500 + with 5 speed automatic trans | | | |
| Wheelbase 189 or 208; Overall length approx 24.5+'; Rear Wheel Drive, 102'+ body | | | |
| Interior ramp, no steps | | | |
| Driver side running board | | | |
| Front and rear mud flaps | | | |
| Interior mirror to view passengers | | | |
| Top T-Slider Windows (tinted) with egress window lights (red) or approved equal | | | |
| <ul style="list-style-type: none"> • 5/8" engineered wood floor with poly urea sprayed undercoating and edges – including all w/c track cutouts • Poly Urea Interior floor coating covered up the walls 14" (non-skid) or approved equal | | | |
| <ul style="list-style-type: none"> • All Exterior Lights LED • All Interior lights LED • Center mounted Brake Light LED | | | |

| | | |
|---|--|--|
| Back up alarm | | |
| OEM front and rear bumpers | | |
| Slide out Battery Tray & Door | | |
| Fuel tank access panel; locking fuel fill door | | |
| Full Air Ride Rear Suspension with Electric Air Compressor <ul style="list-style-type: none"> • Suspension Height Increase Switch • 100% Continuous Duty Cycle Compressor • Air Pressure Gauge and Buzzer • Vehicle Kneeling Override Switch • Computer diagnostic program and link for air ride system • Dash digital display of suspension performance | | |
| AM/FM/CD with at least 4 Speakers PA System (Hand held Microphone) | | |
| <ul style="list-style-type: none"> ▪ 11 mid high fixed seats (Freedman or approved equivalent) with 2 wheelchair positions and 1 double fold up seat over w/c station on curb side. ▪ 2 integrated child safety seats (two locations) ▪ Aisle side seats to have armrests. Aisle-side grab handles. ▪ All seats to have USR 60" seatbelts. ▪ All passenger seats to have level 3 vinyl covers. ▪ Front fold up seat to have TDSS storage system for wheelchair belts installed. | | |
| <ul style="list-style-type: none"> • Stanchion and modesty panel behind entry door • Stanchion with clear plexiglass modesty panel behind driver (do not block view of upper half behind driver's seat) • Standee line (Yellow) and sign | | |
| Safety Kit (Fire/Ext/Triangle) First Aide & Body Fluid Clean Up Kits secured | | |
| 55,000 BTU Passenger air conditioning | | |
| 65,000 BTU Passenger heater with In-Line Pump | | |
| Ceiling Grab Rails (2) | | |
| <ul style="list-style-type: none"> • 40" Electric Passenger entry door with assist handles on each door • 62" Power Ramp (Braun 800# or approved equivalent) mounted in passenger door with park interlock (403/404 compliant) with self-leveling technology • Ramp activation at driver's console and outside entry door • Rotary disconnect switch for body power in drive | | |


| | | |
|--|---|---|
| stepwell | | |
| Electric passenger door with assist handles on each door Assist handles yellow powder coated | | |
| Street-side exhaust | | |
| Two wheelchair stations with Slide-N-Click tiedowns and retractable shoulder belts (QRT MAX or approved equivalent) w/ mounted storage bags | | |
| Transpec 7600 Merge/yield sign or approved equal | | |
| Heated / Remote Controlled Exterior Driver's Mirrors | | |
| Back up Camera mounted on drivers's rearview mirror | | |
| Self-diagnosing 12 Volt electrical panel (fuses) | | |
| Stanchion or passenger rail assist mounting for farebox | | |
| 4 Camera DVR system with 1tb DVR (Apollo Roadrunner or equivalent) | | |
| Full body undercoating | | |
| Provide executive summary of most recent Altoona test for vehicle proposed | | |
| Submit contact information for ALL transit providers/agencies operating similar vehicle(s), serviced within the past 3 years | | |
| Driver's seat USSC EvolutionG2E or approved equal With adjustable headrest and with power base (level 3 upholstery, not vinyl for driver) | | |
| Stop request system (yellow cord) | | |
| TOTAL BASE PRICE | | \$ |
| <i>Requesting Agency's Preferred Specifications Description</i> | <i>Included in Base Price?</i> <i>YES / NO</i> | <i>\$Additional Cost for Option\$</i> <i>(or Note Not Available)</i> |
| Rear Window (No door) w/Fresnel lens for rear window | | |
| Rear Center Mounted LED Brake Light | | |
| Prewire for two way | | |
| Interior Lights on with door open | | |
| Power driver seat base | | |
| 3 Sets of additional keys | | |
| 4- 12 inch seatbelt extensions | | |
| Inner dual tires air valve extension kit | | |

| | | |
|--|--|----|
| 8-scooter tie down loops | | |
| Interior signage-video camera in use; priority seating; please use seat belt (English & Spanish) | | |
| Bus Electrical Schematics (Prefer CD) | | |
| OEM Chassis manuals | | |
| Explain how warranty work and vendor repairs are proposed including transport of vehicle, response time and shop rate for non-warranty repairs | | |
| Warranty page very clear for all applicable components | | |
| Delivery by June 1, 2018 | | |
| | | |
| <i>Subtotal Cost for Preferred Options:</i> | | \$ |
| <i>Total Vehicle Cost With All Options:</i> | | \$ |

Vendor's Signature: _____ **Date Sent:** _____

Vendor's Response Back to RFQ – Please sign and date your response here.

Sample Floorplan (Attach or cut-and-paste new plan here, or attach on back)

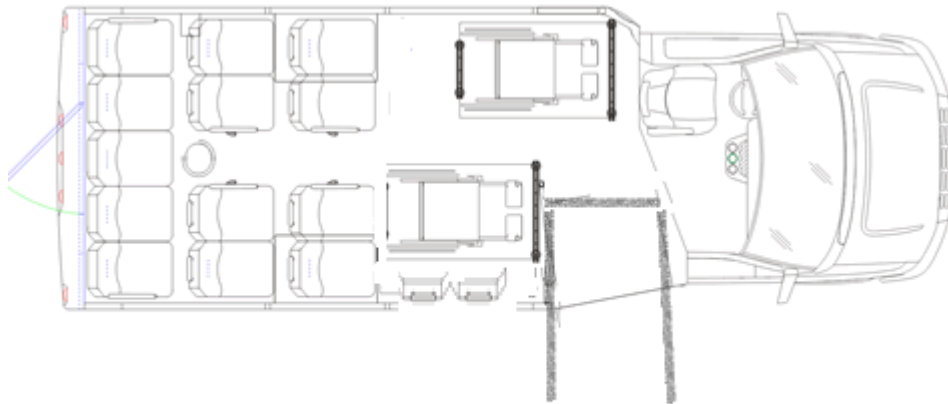

VENDOR INFORMATION

Vendors are strongly encouraged to submit price quotes using the format provided. Vendors should specifically note if and how they meet the above specifications, and note any differences in what has been called out above, in their price quotes. This may be done on the form, or on an attached sheet. The vehicle(s) will be purchased with funding from the Oregon Department of Transportation, Public Transit Division and the Requesting Agency, and will follow applicable Federal and State procurement guidelines.

The City of Sandy through its Transit Department is requesting price quotes from Oregon State Price Agreement Contract Vendors for the purchase of TWO (2) Class D, Medium-Size, Light-Duty Low-Floor Transit Bus, 15 ambulatory passengers or 13+2 W/C station vehicle. Useful

Life: 5 years or 150,000 miles.

Selection will be made on Lowest Price with specified options and subject to references on selection criteria noted below. Purchaser shall have the right to award contract to other than the lowest bidder/offeree based on reference verification and findings. Purchaser shall have the right to reject any or all bids, and to waive any informality and/or irregularity in the bids and in the Bidding.

Price Quote shall be submitted to the Requesting Agency contact person named on the first page on this form.

Bids shall be submitted by January 12, 2019 at 4:00 p.m.

For questions on this request for bid, please contact Andi Howell at 503-489-0925 or email questions to ahowell@ci.sandy.or.us.

Price Quotes may be sent by U.S. Mail, emailed, or faxed to the addresses for Requesting Agency noted on page 1 of this form.

VEHICLE SELECTION INFORMATION

Selection of the vehicle and successful price quote will be based on:

- Lowest Cost with Required Specifications**
- Best Value Determination (ODOT PTD pre-approval required.)**

Selection Criteria

Meeting the Minimum Required Specifications is pass/fail. Vendors' products not meeting the minimum required specifications will not be considered further. Purchase Award is contingent on availability/inclusion of preferred options, passing reference verification stating good customer service, response time, vehicle durability, performance and review of requested vehicle documentation (Altoona testing summary report).

Sample Reference Questions:

Rate on a scale of 1(bad)-10(excellent) your experience with this vendor/vehicle--comments optional

1. Please rate your general experience with (vendor).
2. Please rate your experience with (vendor) regarding each area for this vehicle:
 - a. Customer service
 - b. Responsiveness to inquiries
 - c. Timeliness of delivery; completeness of documentation
 - d. Satisfactory resolution of issues
 - e. Vehicle durability/performance
 - f. Vehicle reliability/downtime
 - g. Customer satisfaction with vehicle