



RAMP/SIDEWALK SLOPE
IN RELATION TO STREET GRADE

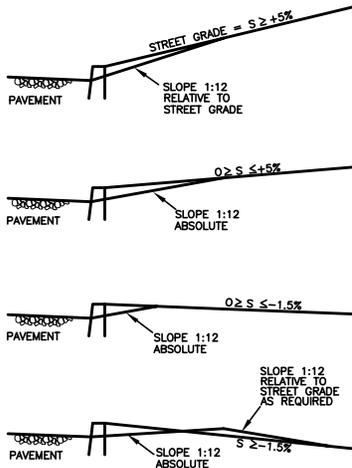


NOTES:

1. FOR SIDEWALK DETAILS, STD. DWG. ST-21.
2. FOR CURB AND GUTTER DETAILS, STD. DWG. ST-20.
3. RAMP WIDTH SHALL BE AS SHOWN UNLESS INDICATED OTHERWISE ON THE PROJECT PLANS.
4. TEXTURE RAMP BY USING AN EXPANDED METAL GRATE PLACED AND REMOVED FROM WET CONCRETE TO LEAVE A DIAMOND PATTERN AS SHOWN. THE LONG AXIS OF THE DIAMOND PATTERN SHALL BE PERPENDICULAR TO THE CURB. GROOVES SHALL BE 1/8" DEEP AND 1/4" WIDE.
5. SIDEWALK RAMP SHALL COMPLY WITH LATEST A.D.A REGULATIONS.
6. EXPANSION JOINTS 1/2"x4" PREMOLDED JOINT FILLER MATERIAL AT LOCATIONS SHOWN. MATERIAL SHALL BE RECESSED OR CUT WITHIN 1/2" OF FINISH CONCRETE SURFACE.
7. CONTROL JOINTS WILL BE 1-1/4" DEEP AT LOCATIONS SHOWN AND TOOL ROUNDED BEFORE TEXTURING.

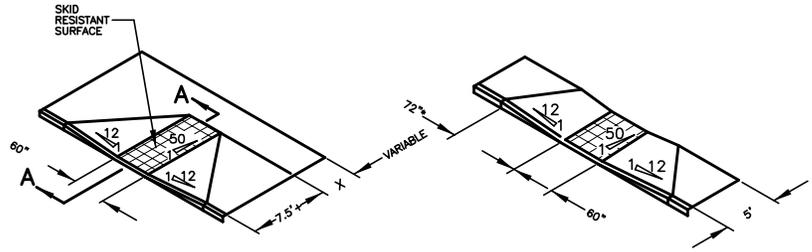


ALTERNATE SIDEWALK RAMP DETAIL

SIDEWALK RAMP DETAIL
(SIDEWALK WIDTH 5' OR LESS)
* FOR 6" CURB

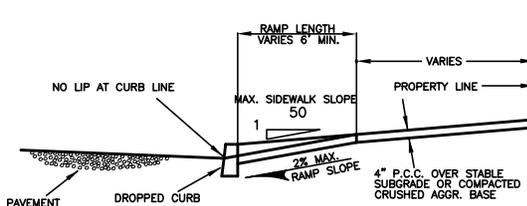


SECTION "A-A"
NOT TO SCALE




RAMP TEXTURE DETAIL


* NOMINAL DIMENSIONS



CENTER RAMP
(CURB LINE WALK)




CENTER RAMP
(CURB LINE AND PROPERTY LINE WALKS)



END RAMP
(PROPERTY LINE WALKS)

TYPICAL RAMP LOCATION
—— EXPANSION JOINT LOCATIONS
- - - - CONTRACTION JOINT LOCATION

REVISED 5/28/99 S.W.P.



CITY OF KEIZER

DEPARTMENT OF PUBLIC WORKS

STANDARD SIDEWALK RAMPS

DRAWN: T.A.K.

DATE: 04-04-95

APPROVED: W.I.P.

NUMBER: ST-22